



PURELITE OFFICE

PURELITE is unobtrusive yet impressive. Like the golden thread of a captivating story, it runs seamlessly and elegantly through any environment. However, PURELITE is far more than just beautiful to look at. The uniquely slim luminaire of only 35 mm in height, including control gear, can be mounted easily and at any time without having to interfere with the statics of the ceiling. Therefore, PURELITE is also perfect for retrofitting. The luminaire is available in a variety of versions ranging from channel lighting system to pendant luminaire and thus allows maximum flexibility in planning for any project. PURELITE perfectly combines aesthetics and functionality. An adaptive line of pure and neat light. A leitmotif for every room.

FEATURES

Simple to integrate into the architecture thanks to its ultra-flat design: height of only 35 mm incl. control gear

Shadow-free lines of light, incl. illumination of the ceiling, timeless design

Available with integrated office-compatible RUN+ diffuser for uninterrupted, seamless lines of light up to 4.2 m long

Clip-in LED batten with integrated through-wiring for quick and easy mounting

For mounting in rows greater than 2250 mm, all lengths in increments of 150 mm

SPECIFICATIONS

Omni-directional, incl. illumination of the ceiling (version available with direct lighting – Purelite D)

Available as a channel lighting system, recessed ceiling luminaire, ceiling and wall mounted luminaire or for pendant luminaire

Support profile made of anodised aluminium, natural finish

Opal diffuser made of high-grade plastic

Dimmable digital DALI

LED batten luminaire replaceable on site

Luminaire efficiency up to 150 lm/W

TECHNICAL DATA

Height x width	35 x 90 mm
Luminous flux of luminaire	1980-3330 lm
Colour temperature	3000 K, 4000 K
Colour Rendering Index (CRI)	Ra ≥ 80
Colour consistency	SDCM 3
Maintained luminous flux	L80 50'000 h
Protection class	I
Ingress Protection	IP20



APPLICATION AREAS

Office & Education: open-plan offices, individual offices, classrooms, meeting rooms, foyers and lobbies, circulation zones

Retail & Hospitality: circulation zones




IP20 650°C 230V



CEILING MOUNTED LUMINAIRE PURELITE OFFICE

Suitable for office lighting [UGR ≤ 19; Lmax ≥ 65° ≤ 3000 cd/m²]


System power	Luminous flux of luminaire	Colour temperature	Length	Ref. n°
22 W	3120 lm	4000 K	1208 mm	2005.2612
22 W	2960 lm	3000 K	1208 mm	2005.2611
27 W	3900 lm	4000 K	1508 mm	2005.2614
27 W	3705 lm	3000 K	1508 mm	2005.2613
37 W	5460 lm	4000 K	2108 mm	2005.2616
37 W	5190 lm	3000 K	2108 mm	2005.2615

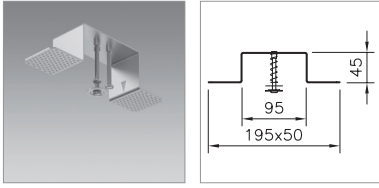

MOUNTING SET PURELITE

for the mounting of support profiles without trim, for 1 – 30 mm false ceilings, Recommended: all 1.5 m

Notes	Bestell-Nummer
	1022.7191



MOUNTING SPRING PURELITE

made of spring steel, to facilitate mounting the support profile on the ceiling, to compensate for uneven surfaces, as a placeholder for cable routing, Recommended: all 1.5 m

Notes	Bestell-Nummer
	1022.7195



SUSPENSION SET PURELITE

Length 1500 mm, with wire suspension and self-lock, load max. 20 kg, mounting recommendation: every 1.5 m

Notes	Bestell-Nummer
2 wire cords, can be clipped into place, with 2 m power feed cable, transparent, with cable clamp	2005.9888
1 wire cord, can be clipped into place, adjustable	2004.0193



DISMANTLING TOOL PURELITE

Tool for removing the batten from the support profile

Notes	Bestell-Nummer
	1022.8951