



PURELITE

PURELITE is unobtrusive yet impressive. Like the golden thread of a captivating story, it runs seamlessly and elegantly through any environment. However, PURELITE is far more than just beautiful to look at. The uniquely slim luminaire of only 35 mm in height, including control gear, can be mounted easily and at any time without having to interfere with the statics of the ceiling. Therefore, PURELITE is also perfect for retrofitting. The luminaire is available in a variety of versions ranging from channel lighting system to pendant luminaire and thus allows maximum flexibility in planning for any project. PURELITE perfectly combines aesthetics and functionality. An adaptive line of pure and neat light. A leitmotif for every room.

FEATURES

Simple to integrate into the architecture thanks to its ultra-flat design: height of only 35 mm incl. control gear

Shadow-free lines of light, incl. illumination of the ceiling, timeless design

Available with integrated office-compatible RUN+ diffuser for uninterrupted, seamless lines of light up to 4.2 m long

Clip-in LED batten with integrated through-wiring for quick and easy mounting

For mounting in rows greater than 2250 mm, all lengths in increments of 150 mm

SPECIFICATIONS

Omni-directional, incl. illumination of the ceiling (version available with direct lighting – PURELITE D)

Available as a channel lighting system, recessed ceiling luminaire, ceiling and wall mounted luminaire or for pendant luminaire

Support profile made of anodised aluminium, natural finish

Opal diffuser made of high-grade plastic

Dimmable digital DALI

LED batten luminaire replaceable on site

Luminaire efficiency up to 150 lm/W


TECHNICAL DATA



Height x width	35 x 90 mm
Luminous flux of luminaire	1980-3330 lm
Colour temperature	3000 K, 4000 K
Colour Rendering Index (CRI)	Ra ≥ 80
Colour consistency	SDCM 3
Maintained luminous flux	L80 50'000 h
Protection class	I
Ingress Protection	IP20

APPLICATION AREAS

Office & Education: open-plan offices, individual offices, classrooms, meeting rooms, foyers and lobbies, circulation zones


Retail & Hospitality: circulation zones





CEILING AND WALL MOUNTED LUMINAIRE PURELITE


System power	Luminous flux of luminaire	Colour temperature	Length	Ref. n°
15 W	2080 lm	4000 K	781 mm	2005.2603
15 W	1980 lm	3000 K	781 mm	2005.2602
14 W	1980 lm	4000 K	1231 mm	2005.2560
14 W	1880 lm	3000 K	1231 mm	2005.2558
22 W	3330 lm	4000 K	1231 mm	2005.2605
22 W	3160 lm	3000 K	1231 mm	2005.2604
17 W	2470 lm	4000 K	1531 mm	2005.2561
17 W	2350 lm	3000 K	1531 mm	2005.2559
27 W	4160 lm	4000 K	1531 mm	2005.2608
27 W	3950 lm	3000 K	1531 mm	2005.2607
23 W	3458 lm	4000 K	2131 mm	2005.2569
23 W	3290 lm	3000 K	2131 mm	2005.2568
37 W	5820 lm	4000 K	2131 mm	2005.2610
37 W	5529 lm	3000 K	2131 mm	2005.2609

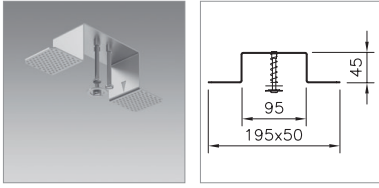

MOUNTING SET PURLITE

for the mounting of support profiles without trim, for 1 – 30 mm false ceilings, Recommended: all 1.5 m

Notes	Bestell-Nummer
	1022.7191



MOUNTING SPRING PURLITE

made of spring steel, to facilitate mounting the support profile on the ceiling, to compensate for uneven surfaces, as a placeholder for cable routing, Recommended: all 1.5 m

Notes	Bestell-Nummer
	1022.7195



SUSPENSION SET PURLITE

Length 1500 mm, with wire suspension and self-lock, load max. 20 kg, mounting recommendation: every 1.5 m

Notes	Bestell-Nummer
2 wire cords, can be clipped into place, with 2 m power feed cable, transparent, with cable clamp	2005.9888
1 wire cord, can be clipped into place, adjustable	2004.0193



DISMANTLING TOOL PURLITE

Tool for removing the batten from the support profile

Notes	Bestell-Nummer
	1022.8951