



SOLO SLIM

SOLO SLIM integrates itself harmoniously into any architecture thanks to its round design. Whether as a ceiling, pendant or freestanding luminaire – SOLO SLIM spreads pleasant light everywhere. The elegant and uniform design makes the luminaire an aesthetic highlight for any room.

FEATURES

Height of frame only 53 mm, white or silver
Aluminium housing
Extremely even spread of light across the opal diffuser or microprismatic optics, suitable for application in offices
Recessed ceiling luminaire with or without trim or especially recessed in concrete
Ceiling mounted luminaire optional halo effect through indirect component [8 %]
Pendant luminaire direct-indirect light emission [61%/39 %]
Available with MyLights Tunable – enabling the colour temperature to be adjusted to align with daylight conditions
LED board and optics replaceable

TECHNICAL DATA

Luminaire efficiency	up to 171 lm/W
Luminous flux of luminaire	1150 – 17'200 lm
Colour temperature	3000 K, 4000 K, 2700 – 6500 K
Colour Rendering Index [CRI]	Ra ≥ 80
Maintained luminous flux	L80 50'000 h
Protection class	I
Ingress Protection	IP40
Colour consistency	SDCM 3
Photobiological safety	Risk group 0, no risk

SPECIFICATIONS

Up to 4 diameters depending on the mounting type: ca. 400 mm, 500 mm, 650 mm, 950 mm
Optics, suitable for application in offices according to EN 12464-1 with Glare control: up to UGR < 16 and maximum luminance up to $L_{max} \leq 3000 \text{ cd/m}^2$
Integrated electronic control gear
Light control: DALI or MyLights Remote Casambi
Suitable for emergency lighting [DC-compatible]
Available with emergency unit
Pendant tube 1 m long as standard; can be shortened on site
Other types of pendant possible thanks to accessories (3 m can be shortened on site, surface mounted and pendant luminaire)
IP44 kit optional
Also available recessed ceiling, ceiling, pendant and freestanding luminaire


FIELDS OF APPLICATION

Office & Education: classrooms, meeting rooms, offices, cafeterias, foyers and lobbies, corridors, staircases
Retail & Hospitality: hotels, reception areas, circulation zones



230V IP40 IK07




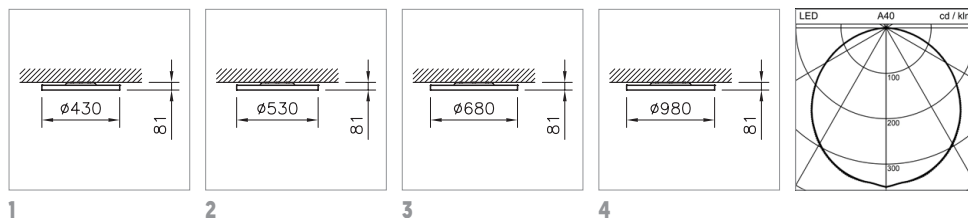

CEILING AND WALL MOUNTED LUMINAIRE SOLO SLIM WITHOUT INDIRECT LIGHTING

Diameter	System power	Luminous flux of luminaire	Colour	Colour temperature	Light control	Notes	Ref. n°
430 mm	8 W	1150 lm	white	4000 K	DALI		1 1021.7117
430 mm	8 W	1060 lm	white	3000 K	DALI		1 1021.7115
430 mm	8 W	1150 lm	silver	4000 K	DALI		1 1021.6923
430 mm	8 W	1060 lm	silver	3000 K	DALI		1 1021.6921
430 mm	15 W	2150 lm	white	4000 K	DALI		1 1021.7121
430 mm	15 W	1980 lm	white	3000 K	DALI		1 1021.7119
430 mm	15 W	2150 lm	silver	4000 K	DALI		1 1021.6927
430 mm	15 W	1980 lm	silver	3000 K	DALI		1 1021.6925
430 mm	17 W	2150 lm	white	4000 K	DALI	with emergency unit	1 2004.0311
430 mm	17 W	1980 lm	white	3000 K	DALI	with emergency unit	1 2004.0310
430 mm	17 W	2150 lm	silver	4000 K	DALI	with emergency unit	1 2004.0279
430 mm	17 W	1980 lm	silver	3000 K	DALI	with emergency unit	1 2004.0278
430 mm	23W	2850 lm	weiss	4000K	MyLights Remote Casambi		1 2006.0631
430 mm	23W	2750 lm	weiss	3000K	MyLights Remote Casambi		1 2006.0630
530 mm	14 W	2200 lm	white	4000 K	DALI		2 1021.7125
530 mm	14 W	2050 lm	white	3000 K	DALI		2 1021.7123
530 mm	14 W	2200 lm	silver	4000 K	DALI		2 1021.6931
530 mm	14 W	2050 lm	silver	3000 K	DALI		2 1021.6929
530 mm	25 W	3600 lm	white	4000 K	DALI		2 1021.7130
530 mm	25 W	3350 lm	white	3000 K	DALI		2 1021.7128
530 mm	25 W	3600 lm	silver	4000 K	DALI		2 1021.6936
530 mm	25 W	3350 lm	silver	3000 K	DALI		2 1021.6934
530 mm	27 W	3600 lm	white	4000 K	DALI	with emergency unit	2 2004.0315
530 mm	27 W	3350 lm	white	3000 K	DALI	with emergency unit	2 2004.0314
530 mm	27 W	3600 lm	silver	4000 K	DALI	with emergency unit	2 2004.0283
530 mm	27 W	3350 lm	silver	3000 K	DALI	with emergency unit	2 2004.0282
530 mm	33 W	4250 lm	white	2700 – 6500 K	MyLights Remote Casambi	MyLights Tunable	2 1021.7126
530 mm	33 W	4250 lm	silver	2700 – 6500 K	MyLights Remote Casambi	MyLights Tunable	2 1021.6932
530 mm	37 W	5200 lm	white	4000 K	DALI		2 1021.7134
530 mm	37 W	4750 lm	white	3000 K	DALI		2 1021.7132
530 mm	37 W	5200 lm	silver	4000 K	DALI		2 1021.6940
530 mm	37 W	4750 lm	silver	3000 K	DALI		2 1021.6938

Diameter	System power	Luminous flux of luminaire	Colour	Colour temperature	Light control	Notes	Ref. n°
680 mm	26 W	3850 lm	white	4000 K	DALI		3 1021.7138
680 mm	26 W	3550 lm	white	3000 K	DALI		3 1021.7136
680 mm	26 W	3850 lm	silver	4000 K	DALI		3 1021.6944
680 mm	26 W	3550 lm	silver	3000 K	DALI		3 1021.6942
680 mm	39 W	5600 lm	white	4000 K	DALI		3 1021.7142
680 mm	39 W	5200 lm	white	3000 K	DALI		3 1021.7140
680 mm	39 W	5600 lm	silver	4000 K	DALI		3 1021.6948
680 mm	39 W	5200 lm	silver	3000 K	DALI		3 1021.6946
680 mm	41 W	5600 lm	white	4000 K	DALI	with emergency unit	3 2004.0319
680 mm	41 W	5200 lm	white	3000 K	DALI	with emergency unit	3 2004.0318
680 mm	41 W	5600 lm	silver	4000 K	DALI	with emergency unit	3 2004.0287
680 mm	41 W	5200 lm	silver	3000 K	DALI	with emergency unit	3 2004.0286
680 mm	60 W	8500 lm	white	4000 K	DALI		3 1021.7146
680 mm	60 W	7900 lm	white	3000 K	DALI		3 1021.7144
680 mm	60 W	8500 lm	silver	4000 K	DALI		3 1021.6952
680 mm	60 W	7900 lm	silver	3000 K	DALI		3 1021.6950
980 mm	56 W	8600 lm	white	4000 K	DALI		4 1021.7150
980 mm	56 W	8000 lm	white	3000 K	DALI		4 1021.7148
980 mm	56 W	8600 lm	silver	4000 K	DALI		4 1021.6956
980 mm	56 W	8000 lm	silver	3000 K	DALI		4 1021.6954
980 mm	75 W	11300 lm	white	4000 K	DALI		4 1021.7154
980 mm	75 W	10400 lm	white	3000 K	DALI		4 1021.7152
980 mm	75 W	11300 lm	silver	4000 K	DALI		4 1021.6960
980 mm	75 W	10400 lm	silver	3000 K	DALI		4 1021.6958
980 mm	77 W	11300 lm	white	4000 K	DALI	with emergency unit	4 2004.0323
980 mm	77 W	10400 lm	white	3000 K	DALI	with emergency unit	4 2004.0322
980 mm	77 W	11300 lm	silver	4000 K	DALI	with emergency unit	4 2004.0291
980 mm	77 W	10400 lm	silver	3000 K	DALI	with emergency unit	4 2004.0290
980 mm	118 W	17200 lm	white	4000 K	DALI		4 1022.4653
980 mm	118 W	15900 lm	white	3000 K	DALI		4 1022.4652
980 mm	118 W	17200 lm	silver	4000 K	DALI		4 1022.4651
980 mm	118 W	15900 lm	silver	3000 K	DALI		4 1022.4650

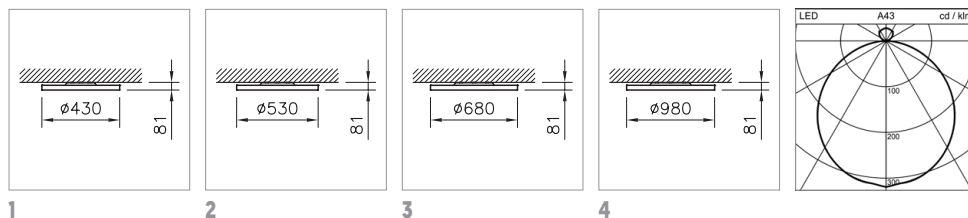

CEILING AND WALL MOUNTED LUMINAIRE SOLO SLIM WITH INDIRECT LIGHTING

Diameter	System power	Luminous flux of luminaire	Colour	Colour temperature	Light control	Notes	Ref. n°
430 mm	8 W	1150 lm	white	4000 K	DALI		1 1021.7176
430 mm	8 W	1060 lm	white	3000 K	DALI		1 1021.7174
430 mm	8 W	1150 lm	silver	4000 K	DALI		1 1021.6981
430 mm	8 W	1060 lm	silver	3000 K	DALI		1 1021.6979
430 mm	15 W	2150 lm	white	4000 K	DALI		1 1021.7180
430 mm	15 W	1980 lm	white	3000 K	DALI		1 1021.7178
430 mm	15 W	2150 lm	silver	4000 K	DALI		1 1021.6985
430 mm	15 W	1980 lm	silver	3000 K	DALI		1 1021.6983
430 mm	17 W	2150 lm	white	4000 K	DALI	with emergency unit	1 2004.0327
430 mm	17 W	1980 lm	white	3000 K	DALI	with emergency unit	1 2004.0326
430 mm	17 W	2150 lm	silver	4000 K	DALI	with emergency unit	1 2004.0295
430 mm	17 W	1980 lm	silver	3000 K	DALI	with emergency unit	1 2004.0294
530 mm	14 W	2200 lm	white	4000 K	DALI		2 1021.7184
530 mm	14 W	2050 lm	white	3000 K	DALI		2 1021.7182
530 mm	14 W	2200 lm	silver	4000 K	DALI		2 1021.6989
530 mm	14 W	2050 lm	silver	3000 K	DALI		2 1021.6987
530 mm	25 W	3600 lm	white	4000 K	DALI		2 1021.7189
530 mm	25 W	3350 lm	white	3000 K	DALI		2 1021.7187
530 mm	25 W	3600 lm	silver	4000 K	DALI		2 1021.6994
530 mm	25 W	3350 lm	silver	3000 K	DALI		2 1021.6992
530 mm	27 W	3600 lm	white	4000 K	DALI	with emergency unit	2 2004.0331
530 mm	27 W	3350 lm	white	3000 K	DALI	with emergency unit	2 2004.0330
530 mm	27 W	3600 lm	silver	4000 K	DALI	with emergency unit	2 2004.0299
530 mm	27 W	3350 lm	silver	3000 K	DALI	with emergency unit	2 2004.0298
530 mm	33 W	4250 lm	white	2700 – 6500 K	MyLights Remote Casambi	MyLights Tunable	2 1021.7185
530 mm	33 W	4250 lm	silver	2700 – 6500 K	MyLights Remote Casambi	MyLights Tunable	2 1021.6990
530 mm	37 W	5200 lm	white	4000 K	DALI		2 1021.7193
530 mm	37 W	4750 lm	white	3000 K	DALI		2 1021.7191
530 mm	37 W	5200 lm	silver	4000 K	DALI		2 1021.6998
530 mm	37 W	4750 lm	silver	3000 K	DALI		2 1021.6996
680 mm	26 W	3850 lm	white	4000 K	DALI		3 1021.7197
680 mm	26 W	3550 lm	white	3000 K	DALI		3 1021.7195
680 mm	26 W	3850 lm	silver	4000 K	DALI		3 1021.7002
680 mm	26 W	3550 lm	silver	3000 K	DALI		3 1021.7000

Diameter	System power	Luminous flux of luminaire	Colour	Colour temperature	Light control	Notes	Ref. n°
680 mm	39 W	5600 lm	white	4000 K	DALI		3 1021.7201
680 mm	39 W	5200 lm	white	3000 K	DALI		3 1021.7199
680 mm	39 W	5600 lm	silver	4000 K	DALI		3 1021.7006
680 mm	39 W	5200 lm	silver	3000 K	DALI		3 1021.7004
680 mm	41 W	5600 lm	white	4000 K	DALI	with emergency unit	3 2004.0335
680 mm	41 W	5200 lm	white	3000 K	DALI	with emergency unit	3 2004.0334
680 mm	41 W	5600 lm	silver	4000 K	DALI	with emergency unit	3 2004.0303
680 mm	41 W	5200 lm	silver	3000 K	DALI	with emergency unit	3 2004.0302
680 mm	60 W	8500 lm	white	4000 K	DALI		3 1021.7205
680 mm	60 W	7900 lm	white	3000 K	DALI		3 1021.7203
680 mm	60 W	8500 lm	silver	4000 K	DALI		3 1021.7010
680 mm	60 W	7900 lm	silver	3000 K	DALI		3 1021.7008
980 mm	56 W	8600 lm	white	4000 K	DALI		4 1021.7209
980 mm	56 W	8000 lm	white	3000 K	DALI		4 1021.7207
980 mm	56 W	8600 lm	silver	4000 K	DALI		4 1021.7014
980 mm	56 W	8000 lm	silver	3000 K	DALI		4 1021.7012
980 mm	75 W	11300 lm	white	4000 K	DALI		4 1021.7213
980 mm	75 W	10400 lm	white	3000 K	DALI		4 1021.7211
980 mm	75 W	11300 lm	silver	4000 K	DALI		4 1021.7018
980 mm	75 W	10400 lm	silver	3000 K	DALI		4 1021.7016
980 mm	77 W	11300 lm	white	4000 K	DALI	with emergency unit	4 2004.0339
980 mm	77 W	10400 lm	white	3000 K	DALI	with emergency unit	4 2004.0338
980 mm	77 W	11300 lm	silver	4000 K	DALI	with emergency unit	4 2004.0307
980 mm	77 W	10400 lm	silver	3000 K	DALI	with emergency unit	4 2004.0306
980 mm	118 W	17200 lm	white	4000 K	DALI		4 1021.7217
980 mm	118 W	17200 lm	white	3000 K	DALI		4 1021.7215
980 mm	118 W	17200 lm	silver	4000 K	DALI		4 1021.7022
980 mm	118 W	15900 lm	silver	3000 K	DALI		4 1021.7020



JOINT RING SOLO

with IP44

Notes	Ref. n°
white, Ø 400 mm	1000.2886
white, Ø 500 mm	1000.2887
white, Ø 650 mm	1000.2888
white, Ø 950 mm	2005.7870



MOUNTING SET SOLO WITH THREE MOUNTING POINTS

for pendant mounting, without cable, $L_{max} = 3$ m, can be shortened on site

Notes	Ref. n°
3000 mm	1000.3193



MOUNTING SET SOLO 3 SUSPENSION CABLES PER MOUNTING POINT

for pendant mounting, without cable, $L_{max} = 3$ m, can be shortened on site


Notes	Ref. n°
3000 mm	1000.3196



CABLE SET SOLO SLIM

for pendant mounting

Notes	Light control	Ref. n°
3 poles, 3000 mm	MyLights Remote + ON/OFF	1008.1440
5 poles, 3000 mm		1008.1445

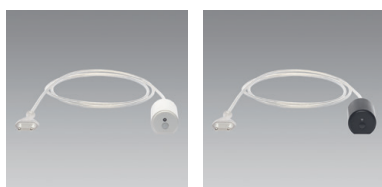

PLUG & PLAY FLEX SENSOR

compatible with MyLights Remote Casambi
 $\varnothing = 40$ mm, L = 60 mm

Notes	Ref. n°
white	2004.9947
black	2004.9946



MYLIGHTS SWITCH

compatible with MyLights Remote Casambi

Notes	Ref. n°
white	1022.0941
black	1022.0942




RETROFITS SOLO

Retrofit kit for older SOLO luminaires (fluorescent lamps and LED)

Mandatory installation accessories must be ordered separately, observe the instructions in the mounting instructions

Diameter	System power	Colour temperature	Light control	Ref. n°
400 mm	8 W	4000 K	DALI	1021.3779
400 mm	8 W	3000 K	DALI	1021.3777
400 mm	15 W	4000 K	DALI	1021.3784
400 mm	15 W	3000 K	DALI	1021.3782
500 mm	14 W	4000 K	DALI	1021.3788
500 mm	14 W	3000 K	DALI	1021.3786
500 mm	25 W	4000 K	DALI	1021.3792
500 mm	25 W	3000 K	DALI	1021.3790
500 mm	37 W	4000 K	DALI	1021.3797
500 mm	37 W	3000 K	DALI	1021.3795
650 mm	26 W	4000 K	DALI	1021.3801
650 mm	26 W	3000 K	DALI	1021.3799
650 mm	39 W	4000 K	DALI	1021.3805
650 mm	39 W	3000 K	DALI	1021.3803
650 mm	60 W	4000 K	DALI	1021.3810
650 mm	60 W	3000 K	DALI	1021.3808
950 mm	56 W	4000 K	DALI	1021.3814
950 mm	56 W	3000 K	DALI	1021.3812
950 mm	75 W	4000 K	DALI	1021.3818
950 mm	75 W	3000 K	DALI	1021.3816
950 mm	118 W	4000 K	DALI	1021.3823
950 mm	118 W	3000 K	DALI	1021.3821



MOUNTING ACCESSORIES FOR THE RETROFITS KIT

SURFACE-MOUNTED LUMINAIRES

Select the correct accessories according to the assembly instructions of the accessories

Notes	Ref. n°
Necessary mounting accessories with Ø 400mm and Ø 500mm	1023.0225
Necessary mounting accessories with Ø 650mm and Ø 950mm	1023.0224