



Item

The Item ceiling mounted luminaire now lends itself to even more fields of application. The new range includes a wider rectangular version as well as a square version, guaranteeing higher luminous flux levels and providing excellent lighting

conditions for all types of office environments. All other features remain the same: uncompromising efficiency, uniform spread of light across the diffuser, low maintenance costs and unmistakable design.

FEATURES

Minimalist ultra-flat design
Luminous flux of luminaire up to 5700 lm
CLD optics for an especially even spread of light
Luminaire efficiency up to 115 lm/W
Suitable for application in offices, up to 5700 lm, $UGR \leq 19$; $L_{max} \geq 65^\circ \leq 3000 \text{ cd/m}^2$

TECHNICAL DATA

System power	21 W, 26 W, 34 W, 43 W, 44 W, 55 W
Luminous flux of luminaire	2300 lm, 2400 lm, 2850 lm, 3000 lm, 3650 lm, 3700 lm, 3800 lm, 3900 lm, 4400 lm, 4600 lm, 4800 lm, 5450 lm, 5700 lm
Colour temperature	3000 K, 4000 K
Colour Rendering Index (CRI)	$R_a \geq 80$
Maintained luminous flux	L80 (B10) 50'000 h
Protection class	I
Ingress Protection	IP20

SPECIFICATIONS

With the latest LED technology
Square or rectangular shape
Housing made of aluminium, powder-coated in white
DALI
Available with emergency unit
3000 K or 4000 K
Operating unit integrated


APPLICATION AREAS

Office & Education: open-plan offices, individual offices, meeting rooms, foyers and lobbies, cafeterias, circulation zones, classrooms

Retail & Hospitality: reception areas, circulation zones, checkout areas




IP20 850°C 230V $\varnothing 0.5m$

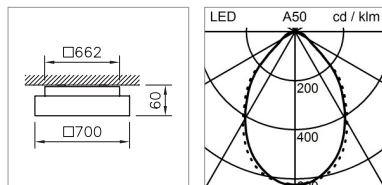




CEILING MOUNTED LUMINAIRE ITEM LED SQUARE

System power	Luminous flux of luminaire	Colour temperature	Length x Wide	Notes	Ref. n°
34 W	3900 lm	4000 K	700 x 700 mm		1004.6191
34 W	3700 lm	3000 K	700 x 700 mm		1004.6190
34 W	3900 lm	4000 K	700 x 700 mm	with emergency unit	1009.0083
34 W	3700 lm	3000 K	700 x 700 mm	with emergency unit	1009.0082
44 W	4800 lm	4000 K	700 x 700 mm		1004.6193
44 W	4600 lm	3000 K	700 x 700 mm		1004.6192
44 W	4800 lm	4000 K	700 x 700 mm	with emergency unit	1009.0085
44 W	4600 lm	3000 K	700 x 700 mm	with emergency unit	1009.0084

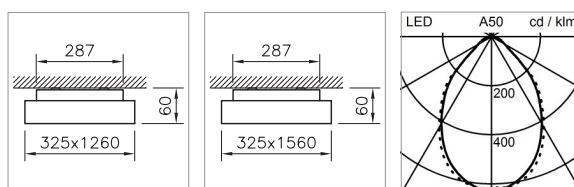

CEILING MOUNTED LUMINAIRE ITEM LED RECTANGULAR WIDE

System power	Luminous flux of luminaire	Colour temperature	Length x Wide	Notes	Ref. n°
34 W	3800 lm	4000 K	1260 x 325 mm		1004.6183
34 W	3650 lm	3000 K	1260 x 325 mm		1004.6182
34 W	3800 lm	4000 K	1260 x 325 mm	with emergency unit	1009.0075
34 W	3650 lm	3000 K	1260 x 325 mm	with emergency unit	1009.0074
44 W	4600 lm	4000 K	1260 x 325 mm		1004.6185
44 W	4400 lm	3000 K	1260 x 325 mm		1004.6184
44 W	4600 lm	4000 K	1260 x 325 mm	with emergency unit	1009.0077
44 W	4400 lm	3000 K	1260 x 325 mm	with emergency unit	1009.0076
43 W	4600 lm	4000 K	1560 x 325 mm		1004.6187
43 W	4400 lm	3000 K	1560 x 325 mm		1004.6186
43 W	4600 lm	4000 K	1560 x 325 mm	with emergency unit	1009.0079
43 W	4400 lm	3000 K	1560 x 325 mm	with emergency unit	1009.0078
55 W	5700 lm	4000 K	1560 x 325 mm		1004.6189
55 W	5450 lm	3000 K	1560 x 325 mm		1004.6188
55 W	5700 lm	4000 K	1560 x 325 mm	with emergency unit	1009.0081
55 W	5450 lm	3000 K	1560 x 325 mm	with emergency unit	1009.0080



CEILING MOUNTED LUMINAIRE ITEM LED

RECTANGULAR NARROW

System power	Luminous flux of luminaire	Colour temperature	Length x Wide	Ref. n°
21 W	2400 lm	4000 K	1260 x 182 mm	1004.6145
21 W	2300 lm	3000 K	1260 x 182 mm	1004.6143
26 W	3000 lm	4000 K	1560 x 182 mm	1004.6157
26 W	2850 lm	3000 K	1560 x 182 mm	1004.6155