



## SOLO SLIM OFFICE

SOLO SLIM integrates itself harmoniously into any architecture thanks to its round design. Whether as a ceiling, pendant or freestanding luminaire – SOLO SLIM spreads pleasant light everywhere. The elegant and uniform design makes the luminaire an aesthetic highlight for any room.

### FEATURES

Height of frame only 53 mm, white or silver
Aluminium housing
Extremely even spread of light across the opal diffuser or microprismatic optics, suitable for application in offices
Recessed ceiling luminaire with or without trim or especially recessed in concrete
Ceiling mounted luminaire optional halo effect through indirect component [8 %]
Pendant luminaire direct-indirect light emission [61 %/39 %]
Available with MyLights Tunable – enabling the colour temperature to be adjusted to align with daylight conditions
LED board and optics replaceable

### TECHNICAL DATA

Luminaire efficiency	up to 171 lm/W
Luminous flux of luminaire	1150 – 17'200 lm
Colour temperature	3000 K, 4000 K, 2700 – 6500 K
Colour Rendering Index [CRI]	Ra ≥ 80
Maintained luminous flux	L80 50'000 h
Protection class	I
Ingress Protection	IP40
Colour consistency	SDCM 3
Photobiological safety	Risk group 0, no risk

### SPECIFICATIONS

Up to 4 diameters depending on the mounting type: ca. 400 mm, 500 mm, 650 mm, 950 mm
Optics, suitable for application in offices according to EN 12464-1 with Glare control: up to UGR < 16 and maximum luminance up to $L_{max} \leq 3000 \text{ cd/m}^2$
Integrated electronic control gear
Light control: DALI or MyLights Remote Casambi
Suitable for emergency lighting [DC-compatible]
Available with emergency unit
Pendant tube 1 m long as standard; can be shortened on site
Other types of pendant possible thanks to accessories (3 m can be shortened on site, surface mounted and pendant luminaire)
IP44 kit optional
Also available recessed ceiling, ceiling, pendant and freestanding luminaire

### FIELDS OF APPLICATION


<b>Office &amp; Education:</b> classrooms, meeting rooms, offices, cafeterias, foyers and lobbies, corridors, staircases
<b>Retail &amp; Hospitality:</b> hotels, reception areas, circulation zones



230V IP40 IK07




A+

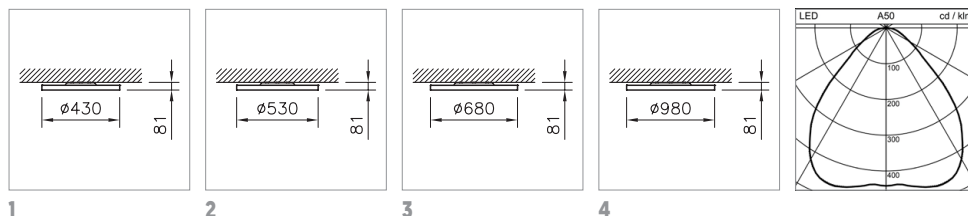

### CEILING MOUNTED LUMINAIRE SOLO SLIM OFFICE WITHOUT INDIRECT LIGHTING

Diameter	System power	Luminous flux of luminaire	Colour	Colour temperature	Light control	Notes	Ref. n°
430 mm	8 W	1150 lm	white	4000 K	dimmable digital DALI		<b>1</b> 1021.7221
430 mm	8 W	1060 lm	white	3000 K	dimmable digital DALI		<b>1</b> 1021.7219
430 mm	8 W	1150 lm	silver	4000 K	dimmable digital DALI		<b>1</b> 1021.7026
430 mm	8 W	1060 lm	silver	3000 K	dimmable digital DALI		<b>1</b> 1021.7024
430 mm	15 W	2150 lm	white	4000 K	dimmable digital DALI		<b>1</b> 1021.7225
430 mm	15 W	1980 lm	white	3000 K	dimmable digital DALI		<b>1</b> 1021.7223
430 mm	15 W	2150 lm	silver	4000 K	dimmable digital DALI		<b>1</b> 1021.7030
430 mm	15 W	1980 lm	silver	3000 K	dimmable digital DALI		<b>1</b> 1021.7028
530 mm	14 W	2200 lm	white	4000 K	dimmable digital DALI		<b>2</b> 1021.7229
530 mm	14 W	2050 lm	white	3000 K	dimmable digital DALI		<b>2</b> 1021.7227
530 mm	14 W	2200 lm	silver	4000 K	dimmable digital DALI		<b>2</b> 1021.7034
530 mm	14 W	2050 lm	silver	3000 K	dimmable digital DALI		<b>2</b> 1021.7032
530 mm	25 W	3700 lm	white	4000 K	dimmable digital DALI		<b>2</b> 1021.7234
530 mm	25 W	3450 lm	white	3000 K	dimmable digital DALI		<b>2</b> 1021.7232
530 mm	25 W	3700 lm	silver	4000 K	dimmable digital DALI		<b>2</b> 1021.7039
530 mm	25 W	3450 lm	silver	3000 K	dimmable digital DALI		<b>2</b> 1021.7037
530 mm	33 W	4350 lm	white	2700 – 6500 K	MyLights Remote Casambi	MyLights Tunable	<b>2</b> 1021.7230
530 mm	33 W	4350 lm	silver	2700 – 6500 K	MyLights Remote Casambi	MyLights Tunable	<b>2</b> 1021.7035
680 mm	26 W	4050 lm	white	4000 K	dimmable digital DALI		<b>3</b> 1021.7242
680 mm	26 W	3750 lm	white	3000 K	dimmable digital DALI		<b>3</b> 1021.7240
680 mm	26 W	4050 lm	silver	4000 K	dimmable digital DALI		<b>3</b> 1021.7047
680 mm	26 W	3750 lm	silver	3000 K	dimmable digital DALI		<b>3</b> 1021.7045
680 mm	39 W	5800 lm	white	4000 K	dimmable digital DALI		<b>3</b> 1021.7246
680 mm	39 W	5300 lm	white	3000 K	dimmable digital DALI		<b>3</b> 1021.7244
680 mm	39 W	5800 lm	silver	4000 K	dimmable digital DALI		<b>3</b> 1021.7051
680 mm	39 W	5300 lm	silver	3000 K	dimmable digital DALI		<b>3</b> 1021.7049
980 mm	56 W	8900 lm	white	4000 K	dimmable digital DALI		<b>4</b> 1021.7250
980 mm	56 W	8200 lm	white	3000 K	dimmable digital DALI		<b>4</b> 1021.7248
980 mm	56 W	8900 lm	silver	4000 K	dimmable digital DALI		<b>4</b> 1021.7055
980 mm	56 W	8200 lm	silver	3000 K	dimmable digital DALI		<b>4</b> 1021.7053
980 mm	75 W	11'900 lm	white	4000 K	dimmable digital DALI		<b>4</b> 1021.7254
980 mm	75 W	11'000 lm	white	3000 K	dimmable digital DALI		<b>4</b> 1021.7252
980 mm	75 W	11'900 lm	silver	4000 K	dimmable digital DALI		<b>4</b> 1021.7059
980 mm	75 W	11'000 lm	silver	3000 K	dimmable digital DALI		<b>4</b> 1021.7057

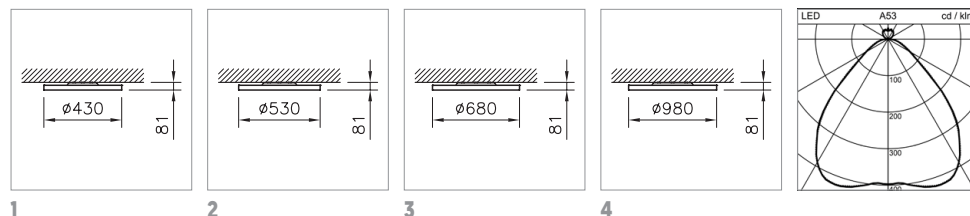

### CEILING MOUNTED LUMINAIRE SOLO SLIM OFFICE WITH INDIRECT LIGHTING

Diameter	System power	Luminous flux of luminaire	Colour	Colour temperature	Light control	Notes	Ref. n°
430 mm	8 W	1150 lm	white	4000 K	dimmable digital DALI		<b>1</b> 1021.7275
430 mm	8 W	1060 lm	white	3000 K	dimmable digital DALI		<b>1</b> 1021.7273
430 mm	8 W	1150 lm	silver	4000 K	dimmable digital DALI		<b>1</b> 1021.7080
430 mm	8 W	1060 lm	silver	3000 K	dimmable digital DALI		<b>1</b> 1021.7078
430 mm	15 W	2150 lm	white	4000 K	dimmable digital DALI		<b>1</b> 1021.7280
430 mm	15 W	1980 lm	white	3000 K	dimmable digital DALI		<b>1</b> 1021.7278
430 mm	15 W	2150 lm	silver	4000 K	dimmable digital DALI		<b>1</b> 1021.7084
430 mm	15 W	1980 lm	silver	3000 K	dimmable digital DALI		<b>1</b> 1021.7082
530 mm	14 W	2200 lm	white	4000 K	dimmable digital DALI		<b>2</b> 1021.7284
530 mm	14 W	2050 lm	white	3000 K	dimmable digital DALI		<b>2</b> 1021.7282
530 mm	14 W	2200 lm	silver	4000 K	dimmable digital DALI		<b>2</b> 1021.7088
530 mm	14 W	2050 lm	silver	3000 K	dimmable digital DALI		<b>2</b> 1021.7086
530 mm	25 W	3700 lm	white	4000 K	dimmable digital DALI		<b>2</b> 1021.7289
530 mm	25 W	3450 lm	white	3000 K	dimmable digital DALI		<b>2</b> 1021.7287
530 mm	25 W	3700 lm	silver	4000 K	dimmable digital DALI		<b>2</b> 1021.7093
530 mm	25 W	3450 lm	silver	3000 K	dimmable digital DALI		<b>2</b> 1021.7091
530 mm	33 W	4350 lm	white	2700 – 6500 K	MyLights Remote Casambi	MyLights Tunable	<b>2</b> 1021.7285
530 mm	33 W	4350 lm	silver	2700 – 6500 K	MyLights Remote Casambi	MyLights Tunable	<b>2</b> 1021.7089
680 mm	26 W	4050 lm	white	4000 K	dimmable digital DALI		<b>3</b> 1021.7297
680 mm	26 W	3750 lm	white	3000 K	dimmable digital DALI		<b>3</b> 1021.7295
680 mm	26 W	4050 lm	silver	4000 K	dimmable digital DALI		<b>3</b> 1021.7101
680 mm	26 W	3750 lm	silver	3000 K	dimmable digital DALI		<b>3</b> 1021.7099
680 mm	39 W	5800 lm	white	4000 K	dimmable digital DALI		<b>3</b> 1021.7301
680 mm	39 W	5300 lm	white	3000 K	dimmable digital DALI		<b>3</b> 1021.7299
680 mm	39 W	5800 lm	silver	4000 K	dimmable digital DALI		<b>3</b> 1021.7105
680 mm	39 W	5300 lm	silver	3000 K	dimmable digital DALI		<b>3</b> 1021.7103
980 mm	56 W	8900 lm	white	4000 K	dimmable digital DALI		<b>4</b> 1021.7305
980 mm	56 W	8200 lm	white	3000 K	dimmable digital DALI		<b>4</b> 1021.7303
980 mm	56 W	8900 lm	silver	4000 K	dimmable digital DALI		<b>4</b> 1021.7109
980 mm	56 W	8200 lm	silver	3000 K	dimmable digital DALI		<b>4</b> 1021.7107
980 mm	75 W	11'900 lm	white	4000 K	dimmable digital DALI		<b>4</b> 1021.7309
980 mm	75 W	11'000 lm	white	3000 K	dimmable digital DALI		<b>4</b> 1021.7307
980 mm	75 W	11'900 lm	silver	4000 K	dimmable digital DALI		<b>4</b> 1021.7113
980 mm	75 W	11'000 lm	silver	3000 K	dimmable digital DALI		<b>4</b> 1021.7111



### JOINT RING SOLO

with IP44

Notes	Ref. n°
white, Ø 400 mm	1000.2886
white, Ø 500 mm	1000.2887
white, Ø 650 mm	1000.2888
white, Ø 950 mm	2005.7870



### MOUNTING SET SOLO

WITH THREE MOUNTING POINTS

for pendant mounting, without cable,  $L_{\max} = 3$  m, can be shortened on site

Notes	Ref. n°
3000 m	1000.3193



### MOUNTING SET SOLO

3 SUSPENSION CABLES PER MOUNTING POINT

for pendant mounting, without cable,  $L_{\max} = 3$  m, can be shortened on site

Notes	Ref. n°
3000 m	1000.3196



### CABLE SET SOLO SLIM

for pendant mounting

Notes	Light control	Ref. n°
3 poles, 3000 mm	Mylights Remote + ON/OFF	1008.1440
5 poles, 3000 mm		1008.1445




### RETROFITS SOLO

Retrofit kit for older SOLO luminaires (fluorescent lamps and LED)

Mandatory installation accessories must be ordered separately, observe the instructions in the mounting instructions

Diameter	System power	Colour temperature	Light control	Ref. n°
400 mm	8 W	4000 K	DALI	1021.3779
400 mm	8 W	3000 K	DALI	1021.3777
400 mm	15 W	4000 K	DALI	1021.3784
400 mm	15 W	3000 K	DALI	1021.3782
500 mm	14 W	4000 K	DALI	1021.3788
500 mm	14 W	3000 K	DALI	1021.3786
500 mm	25 W	4000 K	DALI	1021.3792
500 mm	25 W	3000 K	DALI	1021.3790
500 mm	37 W	4000 K	DALI	1021.3797
500 mm	37 W	3000 K	DALI	1021.3795
650 mm	26 W	4000 K	DALI	1021.3801
650 mm	26 W	3000 K	DALI	1021.3799
650 mm	39 W	4000 K	DALI	1021.3805
650 mm	39 W	3000 K	DALI	1021.3803
650 mm	60 W	4000 K	DALI	1021.3810
650 mm	60 W	3000 K	DALI	1021.3808
950 mm	56 W	4000 K	DALI	1021.3814
950 mm	56 W	3000 K	DALI	1021.3812
950 mm	75 W	4000 K	DALI	1021.3818
950 mm	75 W	3000 K	DALI	1021.3816
950 mm	118 W	4000 K	DALI	1021.3823
950 mm	118 W	3000 K	DALI	1021.3821



## MOUNTING ACCESSORIES FOR THE RETROFITS KIT

### SURFACE-MOUNTED LUMINAIRES

Select the correct accessories according to the assembly instructions of the accessories

Notes	Ref. n°
Necessary mounting accessories with Ø 400mm and Ø 500mm	1023.0225
Necessary mounting accessories with Ø 650mm and Ø 950mm	1023.0224