



Kronos LED

With the Kronos LED, a new era for gimballed, modular recessed spotlights has emerged. The new generation distinguishes itself with the best colour rendition, a high degree of flexibility and greatly reduced maintenance costs. The perfect harmony between design and technology allows for the effective orientation and accent of lighting, so as to present your goods in their best light.

**Excellent
colour rendering:
CRI ≥ 90**

FEATURES

Modular, energy-saving, gimbal recessed spotlight LED in single and double versions
 Gimbal-mounted
 Excellent colour rendering: CRI ≥ 90
 Passive cooling

TECHNICAL DATA

System power	10 W, 19 W
Luminous flux of luminaire	840 lm, 900 lm, 1700 lm, 1900 lm
Colour temperature	3000 K, 4000 K
Colour Rendering Index (CRI)	Ra ≥ 90
Maintained luminous flux	L70 (B50) 50'000h
Protection class	II
Ingress Protection	IP20
Photobiological safety	risk group 0, no risk

SPECIFICATIONS

Square or rectangular shape
 Housing colours: white, black, silver
 3000 K or 4000 K
 ON/OFF or dimmable digital DALI
 Operating unit included in delivery
 Embedding housing available

APPLICATION AREAS


Retail & Hospitality: retail spaces, shop windows, museums, exhibition spaces, galleries, hotels, restaurants, living spaces



IP20

230V



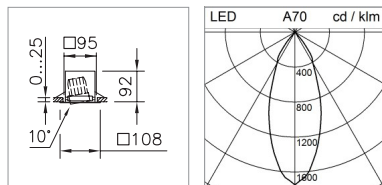

GIMBAL RECESSED SPOTLIGHT KRONOS LED

1 LAMP


Length x width	Luminous flux of luminaire	Colour	Colour temperature	Light control	Ref. n°
108 mm x 108 mm	900 lm	white	4000 K	ON/OFF	2003.1055
108 mm x 108 mm	900 lm	white	4000 K	DALI	2003.1056
108 mm x 108 mm	840 lm	white	3000 K	ON/OFF	2003.1053
108 mm x 108 mm	840 lm	white	3000 K	DALI	2003.1054
108 mm x 108 mm	900 lm	silver	4000 K	ON/OFF	2003.1041
108 mm x 108 mm	900 lm	silver	4000 K	DALI	2003.1042
108 mm x 108 mm	840 lm	silver	3000 K	ON/OFF	2003.1038
108 mm x 108 mm	840 lm	silver	3000 K	DALI	2003.1039
108 mm x 108 mm	900 lm	black	4000 K	ON/OFF	2003.1046
108 mm x 108 mm	900 lm	black	4000 K	DALI	2003.1047
108 mm x 108 mm	840 lm	black	3000 K	ON/OFF	2003.1044
108 mm x 108 mm	840 lm	black	3000 K	DALI	2003.1045



EMBEDDING HOUSING B.BOX

for fairced concrete, in polycarbonate (PC), without halogen

Notes	Ref. n°
	1007.2840

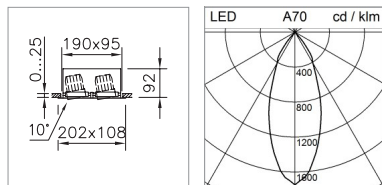

GIMBAL RECESSED SPOTLIGHT KRONOS LED

2 LAMPS

Length x width	Luminous flux of luminaire	Colour	Colour temperature	Light control	Ref. n°
202 mm x 108 mm	1900 lm	white	4000 K	ON/OFF	2003.1068
202 mm x 108 mm	1900 lm	white	4000 K	DALI	2003.1070
202 mm x 108 mm	1700 lm	white	3000 K	ON/OFF	2003.1066
202 mm x 108 mm	1700 lm	white	3000 K	DALI	2003.1067
202 mm x 108 mm	1900 lm	silver	4000 K	ON/OFF	2003.1060
202 mm x 108 mm	1900 lm	silver	4000 K	DALI	2003.1061
202 mm x 108 mm	1700 lm	silver	3000 K	ON/OFF	2003.1057
202 mm x 108 mm	1700 lm	silver	3000 K	DALI	2003.1059
202 mm x 108 mm	1700 lm	black	4000 K	ON/OFF	2003.1064
202 mm x 108 mm	1900 lm	black	4000 K	DALI	2003.1065
202 mm x 108 mm	1700 lm	black	3000 K	ON/OFF	2003.1062
202 mm x 108 mm	1700 lm	black	3000 K	DALI	2003.1063



EMBEDDING HOUSING B.BOX

for fairced concrete, in polycarbonate (PC), without halogen

Notes	Ref. n°
	1007.2843