



Item

The Item LED pendant luminaire guarantees unadulterated elegance, uncompromising efficiency and first-class light quality. The strengths of the Item LED promote the atmosphere in the office as well as concentration and well-being

at the workplace or in meeting rooms. Prime features are: high luminous efficacy, uniform distribution of light, low maintenance costs and clear design.

FEATURES

Direct and indirect lighting
Elegantly designed, up to 3 metres in length, one-piece housing with no visible screws
Luminous flux of luminaire of up to 15'800 lm
CLD optics for an especially even spread of light
Luminaire efficiency up to 112 lm/W
Suitable for application in offices, up to 15'800 lm, UGR ≤ 13; $L_{max} \geq 65^\circ$ ≤ 3000 cd/m ²

TECHNICAL DATA

System power	52 W, 56 W, 65 W, 104 W, 130 W
Luminous flux of luminaire	6000 lm, 6300 lm, 7550 lm, 7900 lm, 12'000 lm, 12'600 lm, 15'100 lm, 15'800 lm
Colour temperature	3000 K, 4000 K
Colour Rendering Index (CRI)	$R_a \geq 80$
UGR	≤ 19
Maintained luminous flux	L80 (B10) 50'000 h
Protection class	I
Ingress Protection	IP20
Photobiological safety	Risk group 0, no risk

SPECIFICATIONS


With the latest LED technology
Rectangular shape
Colours: white, silver
DALI
3000 K or 4000 K
Operating unit integrated

APPLICATION AREAS

Office & Education: open-plan offices, individual offices, meeting rooms, entrance areas, cafeterias, circulation zones, classrooms
Retail & Hospitality: reception areas, circulation zones, checkout areas



IP20 850°C 230V 0.5m

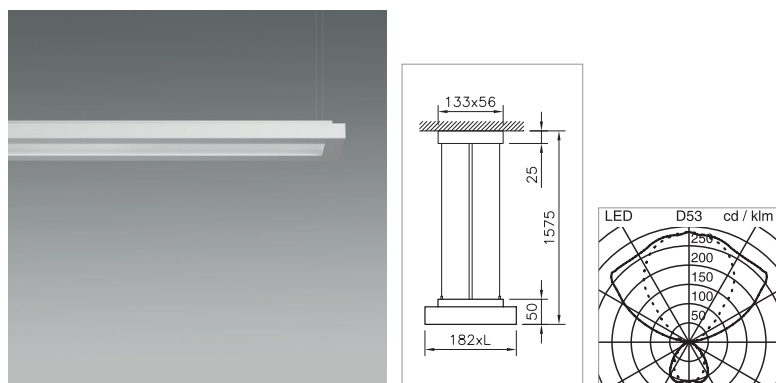

PENDANT LUMINAIRE ITEM LED

Length	System power	Colour	Luminous flux of luminaire	Colour temperature	Ref. n°
1260 mm	52 W	white	6300 lm	4000 K	1004.6109
1260 mm	52 W	white	6000 lm	3000 K	1004.6107
1260 mm	56 W	silver	6300 lm	4000 K	1004.5844
1260 mm	52 W	silver	6000 lm	3000 K	1004.5842
1560 mm	65 W	white	7900 lm	4000 K	1004.6113
1560 mm	65 W	white	7550 lm	3000 K	1004.6111
1560 mm	65 W	silver	7900 lm	4000 K	1004.5848
1560 mm	65 W	silver	7550 lm	3000 K	1004.5846
2440 mm	104 W	white	12'600 lm	4000 K	1004.6117
2440 mm	104 W	white	12'000 lm	3000 K	1004.6115
2440 mm	104 W	silver	12'600 lm	4000 K	1004.5852
2440 mm	104 W	silver	12'000 lm	3000 K	1004.5850
3040 mm	130 W	white	15'800 lm	4000 K	1004.6121
3040 mm	130 W	white	15'100 lm	3000 K	1004.6119
3040 mm	130 W	silver	15'800 lm	4000 K	1004.5856
3040 mm	130 W	silver	15'100 lm	3000 K	1004.5854