



MILANO SLIM OFFICE

MILANO SLIM is total light. 360 degree office light. Light that radiates in all its forms, directly, indirectly and laterally. Light which spreads beautifully outwards, distilled and refined by the frosted diffuser design. Easily mounted, full of features but free of glare, it can grace any office.

FEATURES

- Cylindrical diffuser just 58 mm, timeless design
- Direct-indirect light emission, omni-directional
- 2 optics, new: suitable for application in offices thanks to microprismatic C-LED optics. Diffuser omnidirectional
- Standard-compliant C-LED optics according to EN 12464-1 ensure perfect glare control and light suitable for office use
- Suitable for application in offices thanks to microprismatic C-LED optics with a UGR < 16; $L_{max} \geq 65^\circ \leq 3000 \text{ cd/m}^2$
- Diffuser made of high-grade plastic, attractive
- Extremely homogenous omnidirectional illumination
- Highly Efficient state-of-the-art LEDs, up to 173 lm/W
- LED board and optics replaceable

TECHNICAL DATA

System power	13 W – 69 W
Luminous flux of luminaire	1720 lm – 10'700 lm
Colour temperature	3000 K, 4000 K, 2700-6500 K
Colour Rendering Index [CRI]	Ra ≥ 80
Maintained luminous flux	L80 50'000 h
Protection class	I
Ingress Protection	IP40
Photobiological safety	risk group 0, no risk

SPECIFICATIONS

- Luminaire for mounting on walls and ceiling, and for pendant mounting
- Diameter diffuser: 430 mm, 530 mm, 680 mm
- Pendant tube 1 m long as standard; can be shortened on site
- C-LED optics consisting of an inserted microprismatic plate in a transparent diffuser
- Pendant tube with ball and socket joint, self-adjusting up to 20°
- Other types of pendant possible thanks to accessories (3 m can be shortened on site, surface mounted and pendant luminaire)
- Operating unit integrated
- Suitable for emergency lighting [DC-compatible]
- Ceiling and wall mounted luminaire available with emergency unit
- Colour temperature can be adjusted individually with the Tunable White technology
- Light control: DALI or MyLights Remote Casambi





APPLICATION AREAS

- Office & Education:** classrooms, meeting rooms, offices, reception rooms, cafeterias, foyers and lobbies, corridors
- Retail & Hospitality:** hotels, reception areas, circulation zones







IP40 IK04 650°C




1

2

3

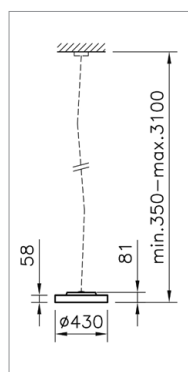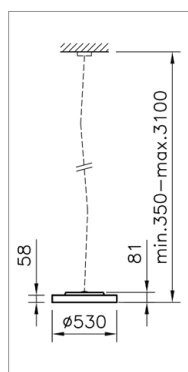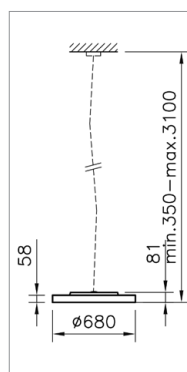
PENDANT LUMINAIRE MILANO SLIM OFFICE C-LED

Diameter	System power	Luminous flux of luminaire	Colour temperature	Light control	Ref. n°
430 mm	26 W	3900 lm	4000 K	DALI	1 2004.2531
430 mm	26 W	3750 lm	3000 K	DALI	1 2004.2530
530 mm	43 W	7000 lm	4000 K	DALI	2 2004.2534
530 mm	43 W	6700 lm	3000 K	DALI	2 2004.2533
530 mm	54 W	7700 lm	2700-6500 K	dimnable digital with MyLights Remote	2 2004.2532
680 mm	69 W	10700 lm	4000 K	DALI	3 2004.2536
680 mm	69 W	10300 lm	3000 K	DALI	3 2004.2535


1

2

3


PENDANT LUMINAIRE MILANO SLIM LED

Mounting kit for pendant suspension to be ordered separately

Diameter	System power	Luminous flux of luminaire	Colour temperature	Light control	Ref. n°
430 mm	26 W	3900 lm	4000 K	DALI	1 2004.2538
430 mm	26 W	3750 lm	3000 K	DALI	1 2004.2537
530 mm	43 W	7000 lm	4000 K	DALI	2 2004.2541
530 mm	43 W	6700 lm	3000 K	DALI	2 2004.2540
530 mm	54 W	7700 lm	2700-6500 K	dimnable digital with MyLights Remote	2 2004.2539
680 mm	69 W	10700 lm	4000 K	DALI	3 2004.2543
680 mm	69 W	10300 lm	3000 K	DALI	3 2004.2542


MOUNTING SET

WITH THREE MOUNTING POINTS

 for pendant mounting, without cable, $L_{\max} = 3 \text{ m}$, can be shortened on site

Notes	Ref. n°
3000 mm	1000.3193


MOUNTING SET

3 SUSPENSION CABLES PER MOUNTING POINT

 for pendant mounting, without cable, $L_{\max} = 3 \text{ m}$, can be shortened on site

Notes	Ref. n°
3000 mm	1000.3196


MOUNTING SET

Pendant tube, silver, can be shortened on site

Notes	Ref. n°
3000 mm	2004.7198