



SOLO SLIM

SOLO SLIM integrates itself harmoniously into any architecture thanks to its round design. Whether as a ceiling, pendant or freestanding luminaire – SOLO SLIM spreads pleasant light everywhere. The elegant and uniform design makes the luminaire an aesthetic highlight for any room.

FEATURES

Height of frame only 53 mm, white or silver
Aluminium housing
Extremely even spread of light across the opal diffuser or microprismatic optics, suitable for application in offices
Recessed ceiling luminaire with or without trim or especially recessed in concrete
Ceiling mounted luminaire optional halo effect through indirect component [8 %]
Pendant luminaire direct-indirect light emission [61 %/39 %]
Available with MyLights Tunable – enabling the colour temperature to be adjusted to align with daylight conditions
LED board and optics replaceable

TECHNICAL DATA

Luminaire efficiency	up to 171 lm/W
Luminous flux of luminaire	1150 – 17'200 lm
Colour temperature	3000 K, 4000 K, 2700 – 6500 K
Colour Rendering Index [CRI]	Ra ≥ 80
Maintained luminous flux	L80 50'000 h
Protection class	I
Ingress Protection	IP40
Colour consistency	SDCM 3
Photobiological safety	Risk group 0, no risk

SPECIFICATIONS

Up to 4 diameters depending on the mounting type: ca. 400 mm, 500 mm, 650 mm, 950 mm
Optics, suitable for application in offices according to EN 12464-1 with Glare control: up to UGR < 16 and maximum luminance up to $L_{max} \leq 3000 \text{ cd/m}^2$
Integrated electronic control gear
Light control: DALI or MyLights Remote Casambi
Suitable for emergency lighting [DC-compatible]
Available with emergency unit
Pendant tube 1 m long as standard; can be shortened on site
Other types of pendant possible thanks to accessories (3 m can be shortened on site, surface mounted and pendant luminaire)
IP44 kit optional
Also available recessed ceiling, ceiling, pendant and freestanding luminaire







FIELDS OF APPLICATION

Office & Education: classrooms, meeting rooms, offices, cafeterias, foyers and lobbies, corridors, staircases
Retail & Hospitality: hotels, reception areas, circulation zones









230V IP40 IK07

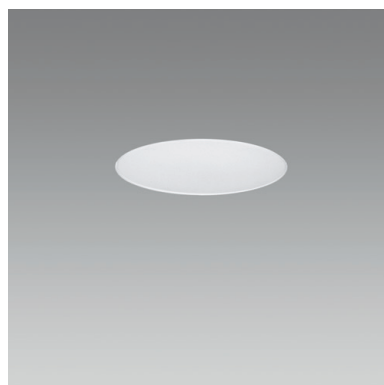


1

2

3

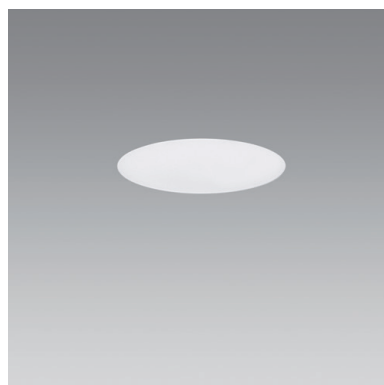4







RECESSED CEILING LUMINAIRE SOLO SLIM WITHOUT CEILING TRIM

Diameter	System power	Luminous flux of luminaire	Colour temperature	Light control	Notes	Ref. n°
414 mm	8 W	1150 lm	4000 K	dimmable digital DALI		1 1022.5456
414 mm	8 W	1060 lm	3000 K	dimmable digital DALI		1 1022.5455
414 mm	15 W	2150 lm	4000 K	dimmable digital DALI		1 1022.5458
414 mm	15 W	1980 lm	3000 K	dimmable digital DALI		1 1022.5457
514 mm	14 W	2200 lm	4000 K	dimmable digital DALI		2 1022.5460
514 mm	14 W	2050 lm	3000 K	dimmable digital DALI		2 1022.5459
514 mm	25 W	3600 lm	4000 K	dimmable digital DALI		2 1022.5463
514 mm	25 W	3350 lm	3000 K	dimmable digital DALI		2 1022.5462
514 mm	37 W	5200 lm	4000 K	dimmable digital DALI		2 1022.5465
514 mm	37 W	4750 lm	3000 K	dimmable digital DALI		2 1022.5464
514 mm	33 W	4250 lm	2700 – 6500 K	MyLights Remote Casambi	MyLights Tunable	2 1022.5461
664 mm	26 W	3850 lm	4000 K	dimmable digital DALI		3 1022.5467
664 mm	26 W	3550 lm	3000 K	dimmable digital DALI		3 1022.5466
664 mm	39 W	5600 lm	4000 K	dimmable digital DALI		3 1022.5469
664 mm	39 W	5200 lm	3000 K	dimmable digital DALI		3 1022.5468
664 mm	60 W	8500 lm	4000 K	dimmable digital DALI		3 1022.5471
664 mm	60 W	7900 lm	3000 K	dimmable digital DALI		3 1022.5470
964 mm	56 W	8600 lm	4000 K	dimmable digital DALI		4 1022.5473
964 mm	56 W	8000 lm	3000 K	dimmable digital DALI		4 1022.5472
964 mm	75 W	11300 lm	4000 K	dimmable digital DALI		4 1022.5475
964 mm	75 W	10400 lm	3000 K	dimmable digital DALI		4 1022.5474
964 mm	118 W	17200 lm	4000 K	dimmable digital DALI		4 1022.5477
964 mm	118 W	15900 lm	3000 K	dimmable digital DALI		4 1022.5476


1

2

3

4


RECESSED CEILING LUMINAIRE SOLO SLIM WITH CEILING TRIM

Diameter	System power	Luminous flux of luminaire	Colour temperature	Light control	Notes	Ref. n°
428 mm	8 W	1150 lm	4000 K	dimmable digital DALI		1 1022.5479
428 mm	8 W	1060 lm	3000 K	dimmable digital DALI		1 1022.5478
428 mm	15 W	2150 lm	4000 K	dimmable digital DALI		1 1022.5481
428 mm	15 W	1980 lm	3000 K	dimmable digital DALI		1 1022.5480
528 mm	14 W	2200 lm	4000 K	dimmable digital DALI		2 1022.5483
528 mm	14 W	2050 lm	3000 K	dimmable digital DALI		2 1022.5482
528 mm	25 W	3600 lm	4000 K	dimmable digital DALI		2 1022.5486
528 mm	25 W	3350 lm	3000 K	dimmable digital DALI		2 1022.5485
528 mm	33 W	4250 lm	2700 – 6500 K	MyLights Remote Casambi	MyLights Tunable	2 1022.5484
528 mm	37 W	5200 lm	4000 K	dimmable digital DALI		2 1022.5488
528 mm	37 W	4750 lm	3000 K	dimmable digital DALI		2 1022.5487
680 mm	26 W	3850 lm	4000 K	dimmable digital DALI		3 1022.5490
680 mm	26 W	3550 lm	3000 K	dimmable digital DALI		3 1022.5489
680 mm	39 W	5600 lm	4000 K	dimmable digital DALI		3 1022.5492
680 mm	39 W	5200 lm	3000 K	dimmable digital DALI		3 1022.5491
680 mm	60 W	8500 lm	4000 K	dimmable digital DALI		3 1022.5494
680 mm	60 W	7900 lm	3000 K	dimmable digital DALI		3 1022.5493
980 mm	56 W	8600 lm	4000 K	dimmable digital DALI		4 1022.5496
980 mm	56 W	8000 lm	3000 K	dimmable digital DALI		4 1022.5495
980 mm	75 W	11300 lm	4000 K	dimmable digital DALI		4 1022.5498
980 mm	75 W	10400 lm	3000 K	dimmable digital DALI		4 1022.5497
980 mm	118 W	17200 lm	4000 K	dimmable digital DALI		4 1022.5500
980 mm	118 W	15900 lm	3000 K	dimmable digital DALI		4 1022.5499


1

2

3

4


RECESSED CEILING LUMINAIRE SOLO SLIM FOR CONCRETE RECESSED MOUNTING

Diameter	System power	Luminous flux of luminaire	Colour temperature	Light control	Notes	Ref. n°
414 mm	8 W	1150 lm	4000 K	dimmable digital DALI		1 1022.5502
414 mm	8 W	1060 lm	3000 K	dimmable digital DALI		1 1022.5501
414 mm	15 W	2150 lm	4000 K	dimmable digital DALI		1 1022.5504
414 mm	15 W	1980 lm	3000 K	dimmable digital DALI		1 1022.5503
514 mm	14 W	2200 lm	4000 K	dimmable digital DALI		2 1022.5506
514 mm	14 W	2050 lm	3000 K	dimmable digital DALI		2 1022.5505
514 mm	25 W	3600 lm	4000 K	dimmable digital DALI		2 1022.5509
514 mm	25 W	3350 lm	3000 K	dimmable digital DALI		2 1022.5508
514 mm	33 W	4250 lm	2700 – 6500 K	MyLights Remote Casambi	MyLights Tunable	2 1022.5507
514 mm	37 W	5200 lm	4000 K	dimmable digital DALI		2 1022.5511
514 mm	37 W	4750 lm	3000 K	dimmable digital DALI		2 1022.5510
664 mm	26 W	3850 lm	4000 K	dimmable digital DALI		3 1022.5513
664 mm	26 W	3550 lm	3000 K	dimmable digital DALI		3 1022.5512
664 mm	39 W	5600 lm	4000 K	dimmable digital DALI		3 1022.5515
664 mm	39 W	5200 lm	3000 K	dimmable digital DALI		3 1022.5514
664 mm	60 W	8500 lm	4000 K	dimmable digital DALI		3 1022.5517
664 mm	60 W	7900 lm	3000 K	dimmable digital DALI		3 1022.5516
964 mm	56 W	8600 lm	4000 K	dimmable digital DALI		4 1022.5519
964 mm	56 W	8000 lm	3000 K	dimmable digital DALI		4 1022.5518
964 mm	75 W	11300 lm	4000 K	dimmable digital DALI		4 1022.5521
964 mm	75 W	10400 lm	3000 K	dimmable digital DALI		4 1022.5520
964 mm	118 W	17200 lm	4000 K	dimmable digital DALI		4 1022.5523
964 mm	118 W	15900 lm	3000 K	dimmable digital DALI		4 1022.5522



CEILING MOUNTING PLATE SOLO

for version with ceiling trim Ø 528 mm, for version without ceiling trim Ø 514 mm

Notes	Ref. n°
white, module 600	1000.1830
white, module 625	1000.1831



JOINT RING SOLO

With IP44

Notes	Ref. n°
white, Ø 400 mm	1000.2886
white, Ø 500 mm	1000.2887
white, Ø 650 mm	1000.2888
white, Ø 950 mm	2005.7870



COMPENSATING RING SOLO

for compensation of additionally applied top layers up to a maximum of 13 mm

Notes	Ref. n°
white, 0-13 mm, optional, for Ø 514 mm	2001.7692



DRILLING GAGE SOLO SLIM

Notes	Ref. n°
white, per montaggio degli apparecchi without ceiling trim	1022.6824




RETROFITS SOLO

Retrofit kit for older SOLO luminaires (fluorescent lamps and LED)

Mandatory installation accessories must be ordered separately, observe the instructions in the mounting instructions

Diameter	System power	Colour temperature	Light control	Ref. n°
400 mm	8 W	4000 K	DALI	1021.3779
400 mm	8 W	3000 K	DALI	1021.3777
400 mm	15 W	4000 K	DALI	1021.3784
400 mm	15 W	3000 K	DALI	1021.3782
500 mm	14 W	4000 K	DALI	1021.3788
500 mm	14 W	3000 K	DALI	1021.3786
500 mm	25 W	4000 K	DALI	1021.3792
500 mm	25 W	3000 K	DALI	1021.3790
500 mm	37 W	4000 K	DALI	1021.3797
500 mm	37 W	3000 K	DALI	1021.3795
650 mm	26 W	4000 K	DALI	1021.3801
650 mm	26 W	3000 K	DALI	1021.3799
650 mm	39 W	4000 K	DALI	1021.3805
650 mm	39 W	3000 K	DALI	1021.3803
650 mm	60 W	4000 K	DALI	1021.3810
650 mm	60 W	3000 K	DALI	1021.3808
950 mm	56 W	4000 K	DALI	1021.3814
950 mm	56 W	3000 K	DALI	1021.3812
950 mm	75 W	4000 K	DALI	1021.3818
950 mm	75 W	3000 K	DALI	1021.3816
950 mm	118 W	4000 K	DALI	1021.3823
950 mm	118 W	3000 K	DALI	1021.3821



MOUNTING ACCESSORIES FOR THE RETROFITS KIT

RECESSED LUMINAIRE

Select the correct accessories according to the assembly instructions of the accessories

Notes	Ref. n°
Necessary mounting accessories with Ø 400mm and Ø 500mm	1000.2883
Optional drilling gage for 1000.2883	2005.3824
Necessary mounting accessories with Ø 650mm and Ø 950mm	1023.0224
Necessary mounting accessories for embedded luminaires Ø 400 mm and Ø 500 mm	1000.1813