



Efficient,  
pleasant light.

## Echo 100

It is a well-known fact that all good things come from above. This is particularly true for Echo. Regent's new downlight is a delight even before being switched on. The installation of the lightweight is a matter of seconds and feasible completely tool-free. The luminance of Echo is positively influenced by

both mixing chamber and diffusion disc. The result: a pleasantly soft lighting experience which even sensitive eyes will find enjoyable, yet without compromising efficiency.

### FEATURES

- Glare-free light thanks to highly precise light conduction
- High luminous efficiency
- Passive cooling
- Quick and tool-free mounting
- Lightweight system suitable for all ceiling types
- Streamlined design makes for perfect integration into ceiling architecture
- Lightweight system suitable for all ceiling types

### TECHNICAL DATA

System power	10 W
Luminous flux of luminaire	800 lm, 830 lm, 950 lm, 1000 lm
Colour temperature	3000 K, 4000 K
Colour Rendering Index (CRI)	R <sub>a</sub> ≥ 90
Maintained luminous flux	L90 (B50) 50'000 h
Protection class	I
Ingress Protection	IP20/IP44 from below when mounted in closed ceilings

### SPECIFICATIONS

- Downlight with pleasantly homogeneous luminance levels
- Ceiling cut out 100 mm
- Aluminium-coated or white reflector
- Tool-free assembly of accessories
- DALI light control
- Operating unit included in delivery

### APPLICATION AREAS

**Retail & Hospitality:** retail spaces, presentation of merchandise/key locations, restaurants, hotels, art & culture establishments








IP20  
IP44

230V



0.5m

850°C

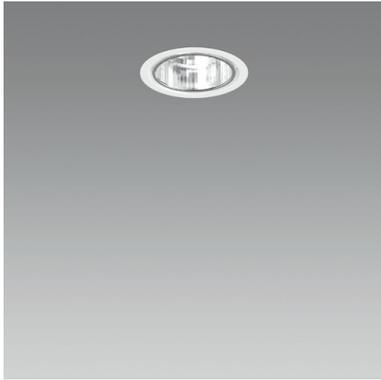

A

B

C

### RECESSED DOWNLIGHT ECHO 100 LED

System power	Luminous flux of luminaire	Colour temperature	Notes	Ref. n°
10 W	1000 lm	4000 K	reflector silver	A 1023.4123
10 W	950 lm	3000 K	reflector silver	A 1023.4111
10 W	830 lm	4000 K	reflector white	B 1023.4119
10 W	800 lm	3000 K	reflector white	B 1023.4107
10 W	1000 lm	4000 K	reflector silver	C 1023.4127
10 W	950 lm	3000 K	reflector silver	C 1023.4115



### COVER RING ECHO 100 LED

clear

Colour	Notes	Ref. n°
white	IP44 from below, in case of closed ceilings	1023.4594
silver	IP44 from below, in case of closed ceilings	1023.4592
white	IP55 from below, in case of closed ceilings	1023.4590
silver	IP55 from below, in case of closed ceilings	1023.4588



### COVER RING ECHO 100 LED

matt

Colour	Notes	Ref. n°
white	IP55 from below, in case of closed ceilings	1023.4574
silver	IP55 from below, in case of closed ceilings	1023.4572



### RING ECHO 100 LED

Notes	Ref. n°
	1023.4570



### EMBEDDING HOUSING B.BOX

Notes	Ref. n°
	2000.9151