

 **REGENT**
LIGHTING



TITAN
Invincible
lighting power.

PEOPLE LIGHT OUR WAY

TITAN

Powerful light for
peak performances.

TITAN sets a new standard in professional and uncompromising lighting. This high-performance luminaire combines robust construction, high efficiency, and unparalleled versatility. The well-thought-out linear form combines functionality with contemporary design, making **TITAN** the ideal solution for most demanding environments.

From sports centers and multi-purpose halls to large indoor spaces and covered outdoor areas – **TITAN** reliably delivers optimum lighting under the toughest conditions. Thanks to its modern lens optics or diffuse cover, ball-proof design and flexible mounting options, **TITAN** is suitable for numerous applications.





Top performance, great efficiency

With an impressive 163 lumens per watt, **TITAN** sets new standards in high-performance lighting. The modern lens optics ensure maximum brightness with minimum energy consumption, so every watt is utilised optimally.

High-impact resistant

TITAN meets all the requirements of DIN EN 12193 for ball-impact safety and offers reliable protection thanks to its robust IK08 protection rating. This standard conformity, tested and accredited by DAKKS, makes **TITAN** the perfect solution for all places where robustness and safety are crucial.

Reliable protection

TITAN offers IP54 protection for individual luminaires and system luminaires up to 4,5m. This robust design ensures protection against dust and splashing water, making it the ideal choice for demanding environments such as sports centers, industrial facilities and many more.

individually customisable

With four application-specific beam patterns, various length combinations and a wide range of mounting options, **TITAN** can be adapted to any challenge.




read the full story:



TITAN

Product range overview


Lengths
Single luminaire, 1,5 m and 3 m System luminaire, up to 21 m [inserts with 1,5 m, 3 m or 4,5 m]
Luminaire luminous flux (1.5 m)
5'300–16'500 lm / up to 163 lm/W [clear] 3'800–5'800 lm / up to 115 lm/W [opal]
Glare control
Clear optics, UGR ≤ 22 Opal diffuser, UGR ≤ 25
Colour temperature
4'000 K
Protection class
IK08 and IP54
Mounting
Recessed [system only], surface-mounted, chain and rope-suspension, angle mounting [30°, 45°, 60°]
Light control
DALI

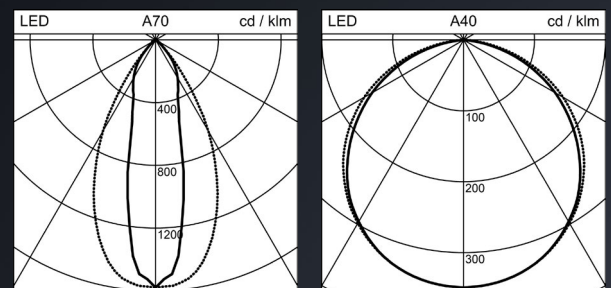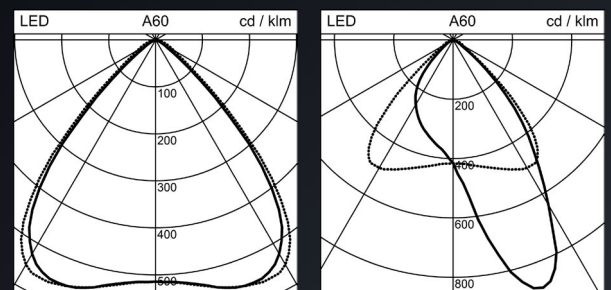

Clear optics



Opal diffuser

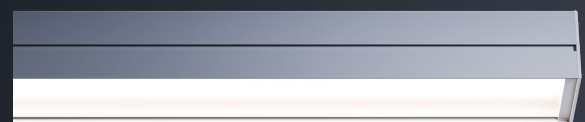

For more information, please visit www.regent.ch/en/titan
#peoplelightourway



Subject to technical modifications.
Regent assumes no liability for printing errors.