



Slash 2

The Slash 2 profile luminaire impresses with its elegant aluminium profile, smooth lines and high energy efficiency.



Unmatched
elegance

FEATURES

Elegant aluminium profile with aesthetic proportions
Satin diffuser
APD (Added Performance Diffuser)
Shadow-free line of light and timeless design
Aluminium housing, anodised
No visible screws
End face also made of aluminium

TECHNICAL DATA

System power	16 W, 21 W, 32 W, 42 W, 48 W, 63 W
Luminous flux of luminaire	1380 lm, 1450 lm, 1760 lm, 1850 lm, 2760 lm, 2900 lm, 3520 lm, 3700 lm, 4140 lm, 4350 lm, 5280 lm, 5550 lm
Colour temperature	3000 K, 4000 K
Colour Rendering Index (CRI)	Ra ≥ 80
Maintained luminous flux	L80 (B10) 50'000 h
Protection class	I
Ingress Protection	IP20


SPECIFICATIONS

Lengths: 1186 mm, 2355 mm, 3525 mm
2 performance levels: HE (High Efficiency) or HPE (High Performance Efficiency)
Colour temperatures: 3000 K, 4000 K
Colour Rendering Index: Ra ≥ 80
ON/OFF or dimmable digital DALI
Versions with emergency unit available

APPLICATION AREAS

Office & Education: offices, reception rooms, counters
Retail & Hospitality: hotels, restaurants



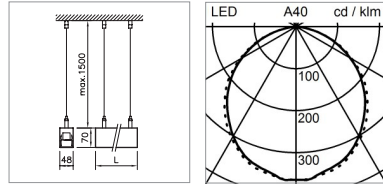

PENDANT LUMINAIRE SLASH 2 LED

System power	Luminous flux of luminaire	Colour temperature	Length	Light control	Notes	Ref. n°
16 W	1450 lm	4000 K	1186 mm	ON/OFF		1003.0529
16 W	1450 lm	4000 K	1186 mm	DALI		1003.0530
16 W	1380 lm	3000 K	1186 mm	ON/OFF		1003.0527
16 W	1380 lm	3000 K	1186 mm	DALI		1003.0528
16 W	1450 lm	4000 K	1186 mm	ON/OFF	with emergency unit	1008.9635
16 W	1380 lm	3000 K	1186 mm	ON/OFF	with emergency unit	1008.9634
21 W	1850 lm	4000 K	1186 mm	ON/OFF		1003.0533
21 W	1850 lm	4000 K	1186 mm	DALI		1003.0534
21 W	1760 lm	3000 K	1186 mm	ON/OFF		1003.0531
21 W	1760 lm	3000 K	1186 mm	DALI		1003.0532
21 W	1850 lm	4000 K	1186 mm	ON/OFF	with emergency unit	1008.9637
21 W	1750 lm	3000 K	1186 mm	ON/OFF	with emergency unit	1008.9636
32 W	2900 lm	4000 K	2355 mm	ON/OFF		1003.0537
32 W	2900 lm	4000 K	2355 mm	DALI		1003.0538
32 W	2760 lm	3000 K	2355 mm	ON/OFF		1003.0535
32 W	2760 lm	3000 K	2355 mm	DALI		1003.0536
42 W	3700 lm	4000 K	2355 mm	ON/OFF		1003.0541
42 W	3700 lm	4000 K	2355 mm	DALI		1003.0542
42 W	3520 lm	3000 K	2355 mm	ON/OFF		1003.0539
42 W	3520 lm	3000 K	2355 mm	DALI		1003.0540
48 W	4350 lm	4000 K	3525 mm	ON/OFF		1003.0545
48 W	4350 lm	4000 K	3525 mm	DALI		1003.0546
48 W	4140 lm	3000 K	3525 mm	ON/OFF		1003.0543
48 W	4140 lm	3000 K	3525 mm	DALI		1003.0544
63 W	5550 lm	4000 K	3525 mm	ON/OFF		1003.0549
63 W	5550 lm	4000 K	3525 mm	DALI		1003.0550
63 W	5280 lm	3000 K	3525 mm	ON/OFF		1003.0547
63 W	5280 lm	3000 K	3525 mm	DALI		1003.0548